

NOVA *plus*

PORTABLE EMISSIONS ANALYZER

for industrial combustion / emissions tuning,
compliance reporting, or trouble-shooting



since 1984 ®

AIR fair

EMISSION MONITORING SYSTEMS

Over 30 years of innovative gas analysis!

- Simultaneous measurement of up to 8 gases
- Automatic calculations and data logging
- Easy operation via intuitive Remote Control Unit
- Rugged design for extreme field conditions
- Accuracy and reliability on numerous applications

BUILT TO DO MORE ...

Built in high speed printer



OPTIONAL gas cooler



OPTIONAL CO sensor protection NOx / SOx filter



Big, bright color display



RCU - Remote control unit wireless charging



RCU - COMFORT with additional ports for pres. / temp.



BASE Unit:

Measuring O₂, CO, CO₂, NO, NO₂, SO₂, CO-high, & CO-very high,
Stack temperatures up to 2000°F
Draft pressure to ±40"

- Emission calculations of mass flow, calculated or True NO(x), plus O₂ referencing to user defined values
- Combustion calculations of CO₂, CO/CO₂ ratio, Excess air, Air ratio, Dewpoint, Efficiency & Heat losses
- Large condensate separator with PTFE coated filter
- High energy Li-Ion battery provides up to 20 hours operation time
- Built-in speed printer with easy paper loading for quick on-site documentation
- Compact and rugged transport case

Options:

- Gas conditioning via high efficiency Peltier gas cooler
- CO protection with fresh air pump and cut off valve
- Internal sample flow monitoring
- Auto zeroing

Remote Control Units (RCU)

BASIC RCU:

- Bluetooth communication with base unit
- Large color graphic, backlit display with zoom function
- Simple, intuitive operation customizable screen settings
- Durable and dirt resistant keypad
- 16,000 measurement internal data storage
- High energy Li-Ion battery provides up to 30 hours operation time
- Wireless battery charging via Base Unit cradle
- USB interface
- SD card reader for additional memory and easy data handling
- Optional - Wireless PC interface via Bluetooth

Additional features of the COMFORT RCU:


- Integrated Manometer for differential pressure and flow
- Differential Temperature inputs
- Auxiliary (AUX) input for optional HC or humidity probe

Software Options:

- Emission PRO - Emission Compliance software
- MRU 4 U Application for iOS and Android SMART devices

CUSTOMIZED FOR YOUR NEEDS

PROBES AND PROBE TUBES

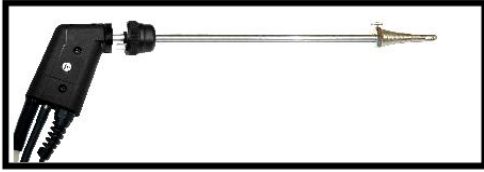

Industrial probe for interchangeable probe tubes with 9' or 16' rugged, braided sheathed sampling line and Viton hose for combustion and emission measurements



probe tubes (4" to 80" long)
in SS (1,200°F) or Inconel (2,000°F)
Also available with sintered metal filter



Industrial probe for interchangeable probe tubes and 9' sampling line, heated probe handle with easy replaceable quartz glass wool filter for industrial combustion analysis




High temp ceramic probe (3,000°F)
Without temperature measurement




L-Type SS with or without K-Type t/c
In sizes from 4" (0.12Ø) to 79" (0.47 Ø)

PITOT TUBES

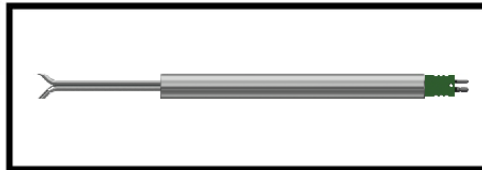

S-Type SS with K-Type t/c (59" lead) and 1.1"Ø
protection tube
Available in 19" or 39" lengths (0.31"Ø)

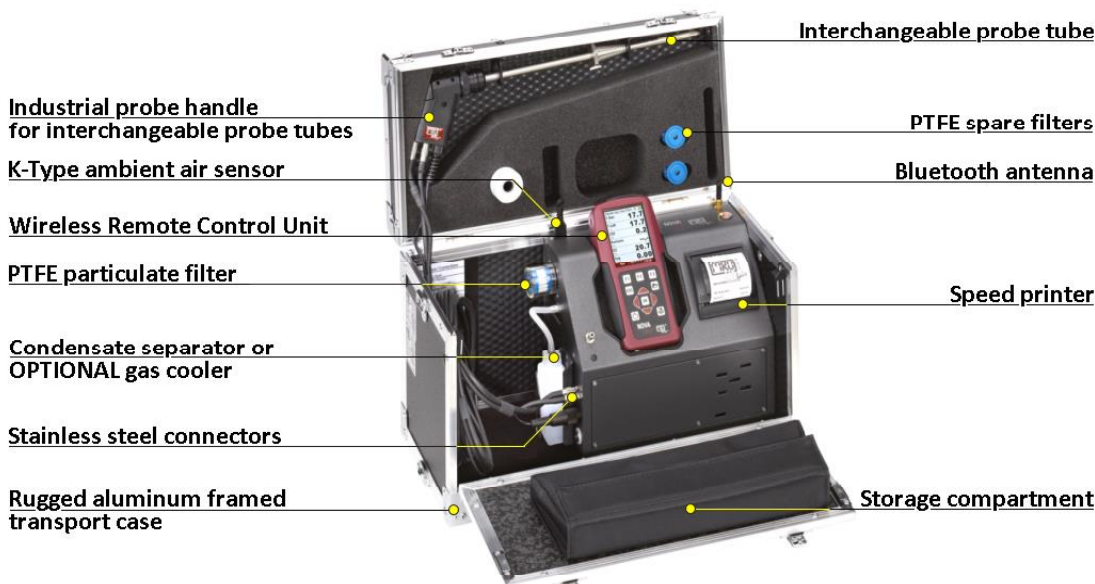

Industrial probe handle
for interchangeable probe tubes

K-Type ambient air sensor

Wireless Remote Control Unit

PTFE particulate filter

Condensate separator or
OPTIONAL gas cooler

Stainless steel connectors

Rugged aluminum framed
transport case


Interchangeable probe tube

PTFE spare filters

Bluetooth antenna

Speed printer

Storage compartment



Exchangeable probe tubes for 1,200°F to 2,000°F




Sintered metal filter



HC leak detection probe (requires AUX output option)



Rugged, aluminum framed transport case



Additional storage | Mounted under transport case

TECHNICAL SPECIFICATIONS

NOVAplus analyzer	Portable analyzer with up to 5 electrochemical sensors and 3 gas NDIR bench
Fuel types	Natural gas, propane, butane, #2, #5, & #6 light oils, heavy oil, kerosene, distillate #1, diesel, coal, coal anthracite & bituminous, wood (dry, 10%, 20%, 30%, &40% M.), pellets, and four user defined fuel types

Measurement components		Measuring range	Accuracy
O ₂	Oxygen	0 ... 21.0 Vol-%	± 0.2 Vol-% abs.
CO	Carbon monoxide (H ₂ compensated)	0 ... 4,000 ppm overload 20,000ppm *	± 10 ppm or 5 % reading < 4,000 ppm / 10 % reading > 4,000 ppm
CO	Carbon monoxide low	0 ... 500 ppm with 0.1 ppm resolution **	± 2.0 ppm or** 5 % reading
CO	Carbon monoxide very high	0 ... 40,000 ppm overload 100,000ppm *	± 0.02% or 5 % reading < 0.4% / 10 % reading > 0.4%
NO	Nitric oxide	0 ... 1,000 ppm overload 5,000ppm *	± 5 ppm or 5 % reading < 1,000 ppm / 10 % reading > 1,000 ppm
NO	Nitric oxide low	0 ... 300 ppm with 0.1 ppm resolution **	± 2.0 ppm or** 5 % reading
NO ₂	Nitrogen dioxide	0 ... 200 ppm overload 1,000ppm *	± 5 ppm or 5 % reading < 200 ppm / 10 % reading > 200 ppm
NO ₂	Nitrogen dioxide low	0 ... 100 ppm with 0.1 ppm resolution **	± 2.0 ppm or** 5 % reading
SO ₂	Sulfur dioxide	0 ... 2,000 ppm overload 5,000ppm *	± 10 ppm or 5 % reading < 2,000 ppm / 10 % reading > 2,000 ppm
H ₂ S	Hydrogen sulfide	0 ... 200 ppm overload 2,000ppm *	± 5 ppm or 5 % reading up to 500 ppm 10 % reading up to 2,000 ppm
CO ₂	Carbon dioxide single NDIR	0.....40%	± 0.3 Vol-% abs. or 5% reading
CO	CO Carbon monoxide	3 Gas NDIR 0.....10,000ppm up to 10%	± 0.03% or ±3% of reading
CO ₂	Carbon dioxide	3 Gas NDIR 0.....3% up to 30%	± 0.5% or ±3% of reading
CxHy	Hydrocarbons as CH ₄ or	3 Gas NDIR 0.....10,000ppm up to 3%	± 0.03% or ±3% of reading
CxHy	Hydrocarbons as C ₃ H ₈	3 Gas NDIR 0.....2,000ppm up to 5,000ppm	± 30 ppm or ±3% of reading

*overload range recommend only for short time measurements

**are not separate sensors; selected sensors are used with special calibration

Stack / Flue gas temperature	0 ... 1,200°F / 2,012°F (with stainless steel / Inconel steel tube)	± 4°F ... < 392°F / 1 % reading > 392°F
Primary-air / Ambient temperature	0 ... 212°F	± 2°F
Differential temperature	up to 2,012°F (with suitable material of sampling tube)	± 4°F ... < 392°F / 1 % reading > 392°F
Stack / Differential pressure	+/- 40 inH ₂ O (100hPa)	± 0.01 inH ₂ O or 1% reading
Gas flow velocity measurement	1 ... 40 m/s (using Pitot tube)	

Calculated values (fuel type dependent)

Carbon dioxide	0 ... CO ₂ max.	Air Ratio (Lambda)	1 ... 9.99
Heat losses q _A	0 ... 99.9 %	Excess Air	0 ... 99.9
Efficiency	0 ... 100 % / 120 %	CO/CO₂ ratio	0 ... 10

General specifications

Operation temperature	41°F 113°F, max. 95 % RH, none condensing
Storage temperature	-4°F 122°F
Ambient conditions	not in aggressive, corrosive or high dust environments, not for use in hazardous areas
Power supply	- Base Unit - RCU Lithium-Ion battery, 20 h operation, (with gas cooler 10 h) Lithium-Ion battery, 30 h operation
Grid power supply	100 - 240 Vac / 50 ... 60 Hz / 5A
Protection class	IP20
Weight	Complete unit approx. 16.3lbs / RCU 0.88lbs
Dimensions	Complete unit 18.5" x 9" x 12" (W x H x D) RCU 7.36" x 3.54" x 1.5"

Data subject to change without notice

MRU Instruments, Inc.
Humble, Texas 77338
Tel.: (832) 230 - 0155
Fax: (832) 230 - 1553
info@mru-instruments.com
www.mru-instruments.com

Support and sales by: